


Specification Hanse 540e

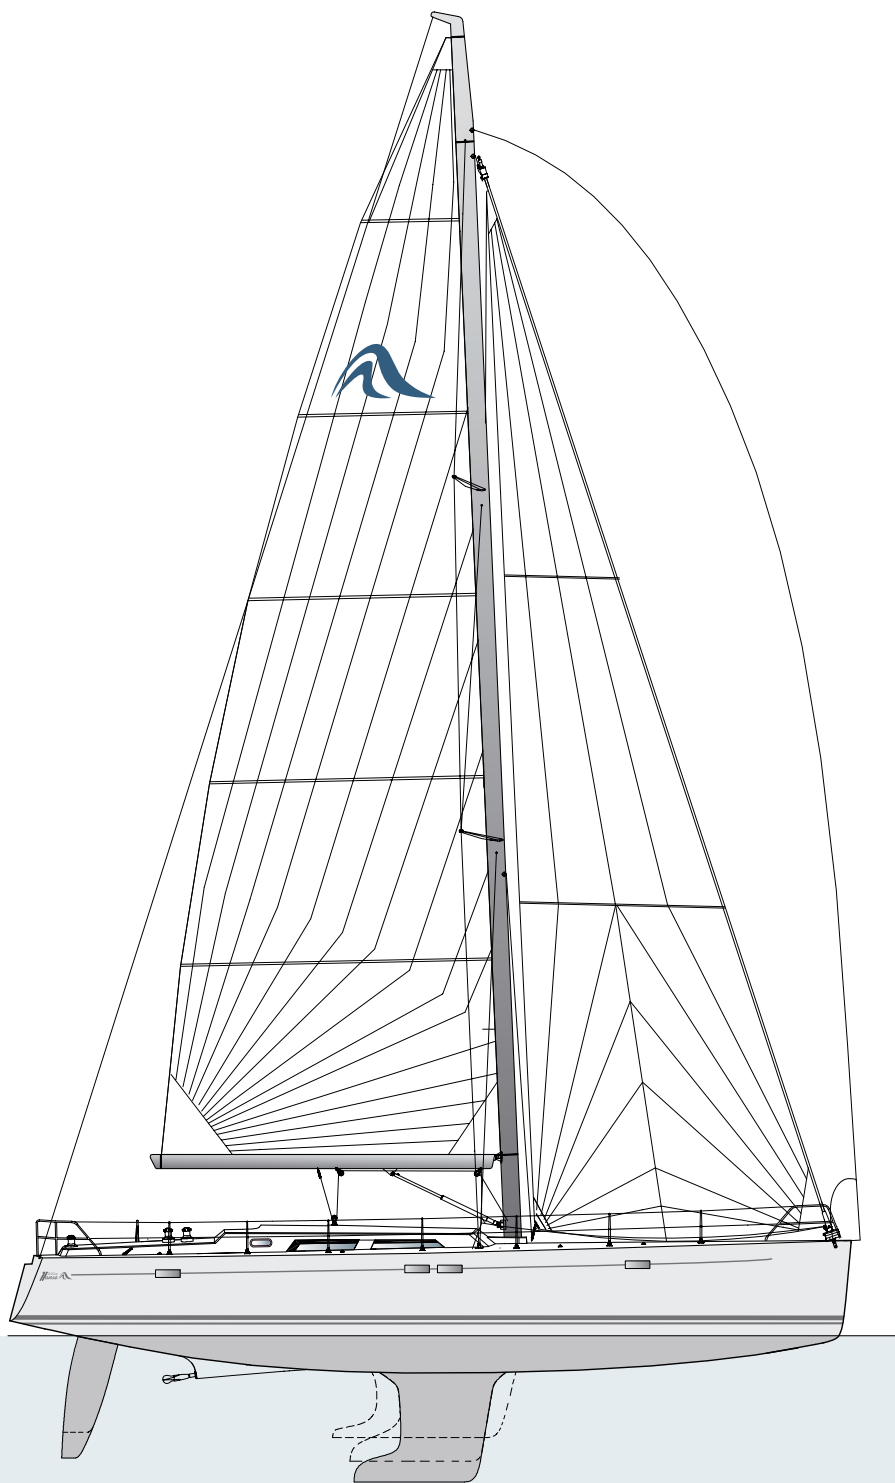

LOA	16.08 m 52'10"
Hull length	16.08 m 52'10"
LWL	14.60 m 47'11"
Beam	4.91 m 16'1"
Draft	2.80 m 9'2" (standard) 2.43 m 8' (option) 1.95 m 6'5" (option)
Displacement	aprox. 18.7 t aprox. 41,226 lb
Ballast	aprox. 5.8 t aprox. 12,804 lb
Engine	80.9 kW / 110 HP
Fresh water	aprox. 710 l
Fuel tank	aprox. 395 l
CE Certificate	A (ocean)
Mast length above WL	aprox. 26.25 m aprox. 86'1"
Total sail areal	aprox. 155.00 m ² aprox. 1,668 sq ft
Main sail	aprox. 85.10 m ² aprox. 916 sq ft
Self-tacking jib	aprox. 58.00 m ² aprox. 624 sq ft
Genoa 105%	aprox. 69.00 m ² aprox. 743 sq ft (option)
Gennaker	aprox. 195.00 m ² aprox. 2,100 sq ft (option)
Rig	I 21.25 m 70'11" J 5.99 m 19'7" P 21.45 m 70'5" E 6.50 m 21'4"
Design	judel / vrolijk & co
Interior	HanseYachts Design

Modelyear 2008/2009 - valid from 1st August 2008

[®] 540e
Hanse 

Standard Equipment Hanse 540e

Hull

- Epoxy built hull with prepreg fibreglass fabrics, vacuum bagged with Corecell™ foam, postcured
- White hull with dark grey double waterlines
- Options for different hull colours according to Hanse colour selection
- Opening transom
- Dinghy storage in the aft compartment
- GRP strongback
- Hull windows

Deck

- White Deck
- Hand laid sandwich construction, thermal and sound insulated

Steering System

- Twin wheel steering system
- 2 leather covered steering wheels
- Semi-balanced, profiled rudder with alloy shaft and self-aligning needle bearings
- Emergency tiller

Keel

- Standard composite iron / lead keel
- Performance draft: 2.80 m / 9'2"
- Option: Medium draft keel 2.43 m / 8'
- Option: Shallow draft keel, one piece fully lead 1.95 m / 6'5"
- Stainless steel keel bolts

Deck Equipment

- Teak on side decks
- Teak on seats and cockpit floor
- Teak partly on coach roof
- Partial moulded non-skid surface on the coach roof
- Engine control at helm station stb
- 6 retractable mooring cleats
- Self-draining anchor locker with electrical windlass under deck
- Flush retractable anchor davit with anchor roller and spring

lifting assistance for storage inside the locker

- Stainless steel cockpit table with acrylic glass and chart plotter bracket
- Foredeck sail storage
- Hot & cold shower on aft deck
- Self-draining cockpit
- Halyard storage boxes in the cockpit
- Storage for gas bottle, selfdraining
- Stainless steel swim ladder
- Hinged swimming platform
- Selftacking jib track, fully integrated in the foredeck

- Genoa tracks with pinstop cars
- 2 x 6 sheave deck organizers
- 12 deck jammers
- Padeyes for gennaker
- 7 hatches
- 2 Flush hatches on the coach roof
- Opening portholes in cockpit
- Stainless steel pushpit with navigation light and ensign shaft socket
- Stainless steel split pulpit with navigation lights
- Stainless steel stanchions tapered
- Rail gates on both sides
- 4 winches in cockpit: 1 electrical all purpose winch 54 AEST on starboard halyard position, 1 primary winch 54 AST, 2 secondary winches 46 AST

Technical System

Plumbing System / Fresh Water Tank

- Fresh water tanks, capacity approx. 710 l
- Water infill on deck

Hot water

- 40 l water heater, running from engine and immersion heater 110 V / 230 V

Draining Pumps

Bilge pumps

- 1 manual bilge pump
- 1 electric bilge pump with hose for bracket
- 1 electric bilge pump with automatic switch

Toilet / Head

- 1 electrical toilet in owners cabin, - manual marine toilets for other heads
- 1 stainless steel holding tank with sea and deck discharge for each toilet

Engine

- Yanmar 4JH4-HTE, 80.9 kW / 110 HP, diesel engine
- Stainless steel shaft
- 3 bladed fixed propeller
- 1 alternator 12 V / 80 Amp.
- Fuel tank, capacity approx. 395 l
- Fuel infill on deck
- Fuel filter / Water separator
- Engine room sound insulated and illuminated with room for generator above engine

Electric System

- 12 V and 110 V / 230 V

Batteries

- Main battery switches
- Engine battery: 12 V / 85 Ah
- Service-/ winch battery bank: 12 V / 310 Ah batteries

Battery charger / Shore power

- Battery charger 12 V / 50 A
- Isolator switch
- 2 x 110 V / 230 V shore supply protected with differential breaker and distribution system

Electric switch panel 110 V / 230 V

- 2 differential breakers
- Control gauges
- Voltmeter

Electric switch panel 12 V

- Switches for all onboard electrics
- Voltmeter and battery control
- Water / Fuel gauges

12 V Electric equipment

- Electrical anchor windlass
- Electrical winch, 54 AEST
- Pumps
- Navigation lights
- Interior lights
- Refrigerator
- Freezer frontloading

Outlets 110 V / 230 V

- at chart table twin outlet
- in fwd. cabin one each
- in aft. cabin one each
- in galley twin outlet
- in saloon twin outlet
- in heads one each

Outlets 12 V

- at chart table
- at helm station

Interior lighting

- Overhead lighting in cabins, saloon, galley and heads
- Lighting in engine compartment
- Reading lights in saloon and cabins
- Night light on companion way
- Indirect lighting
- Storage room aft

Navigation lights

- Navigation lights on pulpit and pushpit
- Steaming light
- Anchor light

Navigation instruments

- Compass illuminated
- Speedometer and depth sounder on a combi display at each helm

Galley

- Solid surface, Corean™ black quartz with integrated double sink
- 3-burner LPG stove with oven, gimble
- Gas system and self draining LPG

bottle storage in cockpit

- Microwave
- Extra large fridge of approx. 130 l, top and front loader with light
- Freezer, front loader, capacity approx. 80l
- Lockers and drawers
- Trash can

Interior Accommodation

- High quality marine plywood, mahogany veneer, satin varnish
- Option: American cherry, satin varnish
- White bulkheads
- Wooden door frames
- Wood / Sandwich doors
- Teak styled floor squares in the saloon, individually to be opened
- the optional pricelist shows an alternative floor to our standard teak

Upholstery

- According to Hanse colour selection

Forward cabin

- Version B1 Owner cabin with island berth, extensive hanging lockers and drawers including a head and shower unit in owners state room
- Options according to Hanse Individual Cabin Concept

Main Saloon

- Version C 1
- Large saloon table
- Lockers
- L-shaped sofa on portside
- 2 retractable and ergonomic chairs
- Options according to Hanse Individual Cabin Concept

Navigation area

- Seat with storage
- Locker above chart table for instruments and books
- Space to mount electronics
- 110 V / 230 V / 12 V outlet

- Storage in the chart table
- Chart light

Aft cabin

- Version D1
- 2 double aft cabins with locker space
- Each cabin with individual head and shower

Interior Concepts

- Different layouts, according to Hanse Individual Cabin Concept

Head / Shower

- Toilet and shower in forward cabin with electrical toilet
- Toilet and shower in the aft cabin with manual toilet
- Corean™ solid surface black quartz with sink
- Electrical drain pump
- Mirror
- Locker & shelves
- Opening hatch

Rig and Sails

- 2 spreader silver anodised mast, tapered
- Boom with 2 reefing lines
- Cockpit light integrated in boom
- Mainsail fully battened
- Self-tacking jib
- Furling system for jib
 - Main halyard
- Jib halyard
- Midboom sheeting with 2 stand-up blocks
- Ballside system for mainsail
- Jib sheet
- Rod kicker
- Maindrop system with Lazy Jacks, colour: light grey
- Backstay adjuster

All measurements are approximate. Specification and material can be changed without notice. 540e/A/GB/010808

HanseYachts Aktiengesellschaft

Postfach 31 65 | D-17461 Greifswald | Salinenstr. 22 | D-17489 Greifswald

Tel: +49 (0)3834/5792-0 | Fax: +49 (0)3834/5792-81

sales@hanseyachts.com | www.hanseyachts.com

